




Die Lifting Lug - VDI 3366

Code: **G134**

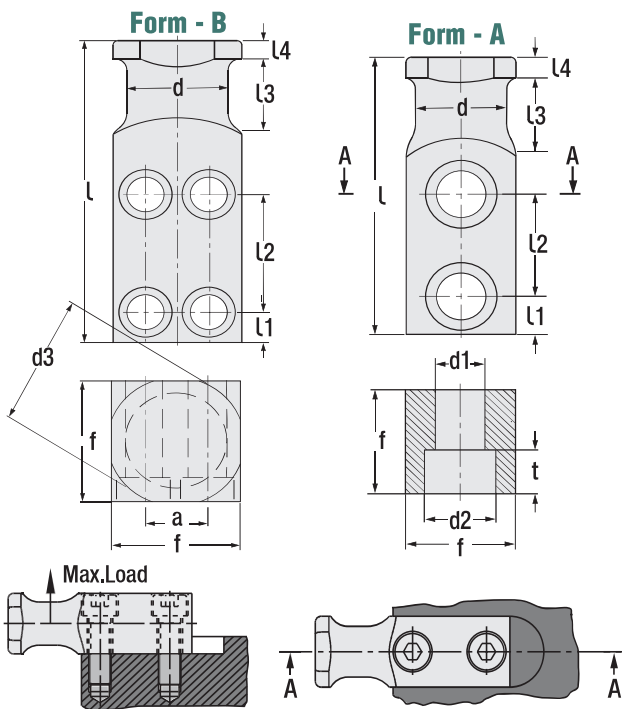


| f   | l   | l1 | l2  | l3 | l4 | Screw    | a  | Form   |
|-----|-----|----|-----|----|----|----------|----|--------|
| 20  | 80  | 10 | 34  | 20 | 6  | M8 x25   | -  | Form A |
| 25  | 90  | 10 | 37  | 25 | 8  | M10 x30  | -  |        |
| 35  | 100 | 12 | 38  | 30 | 8  | M12 x40  | -  |        |
| 40  | 120 | 16 | 46  | 32 | 10 | M16 x45  | -  |        |
| 50  | 140 | 18 | 56  | 40 | 10 | M20 x60  | -  |        |
| 60  | 160 | 22 | 59  | 45 | 12 | M24 x70  | -  |        |
| 80  | 200 | 20 | 78  | 50 | 12 | M20 x90  | 40 | Form B |
| 100 | 250 | 25 | 100 | 65 | 15 | M24 x110 | 50 |        |
| 120 | 300 | 30 | 125 | 80 | 15 | M30 x130 | 60 |        |

| f   | d   | d1   | d2   | d3  | t    | Max.Load  | Max.Capacity |
|-----|-----|------|------|-----|------|-----------|--------------|
| 20  | 16  | 9.5  | 14.5 | 24  | 9    | 320 Kg.   | 640 Kg.      |
| 25  | 20  | 11.5 | 17.5 | 30  | 11   | 630 Kg.   | 1260 Kg.     |
| 35  | 25  | 14   | 20   | 40  | 13   | 1250 Kg.  | 2500 Kg.     |
| 40  | 32  | 18   | 26   | 50  | 17.5 | 2000 Kg.  | 4000 Kg.     |
| 50  | 40  | 23   | 33   | 60  | 21.5 | 3200 Kg.  | 6400 Kg.     |
| 60  | 50  | 27   | 39   | 70  | 25.5 | 5000 Kg.  | 10000 Kg.    |
| 80  | 63  | 23   | 33   | 90  | 21.5 | 8000 Kg.  | 16000 Kg.    |
| 100 | 80  | 27   | 39   | 110 | 25.5 | 12500 Kg. | 25000 Kg.    |
| 120 | 100 | 33   | 48   | 130 | 32   | 20000 Kg. | 40000 Kg.    |

Page

118



Dies

Due to safety reasons, die weight should not exceed maximum load that 2 lifting pins can bear.



Order: **G134.f**




NEW



Die Lifting Lug with Rope Stop Safety

Code: **G58**

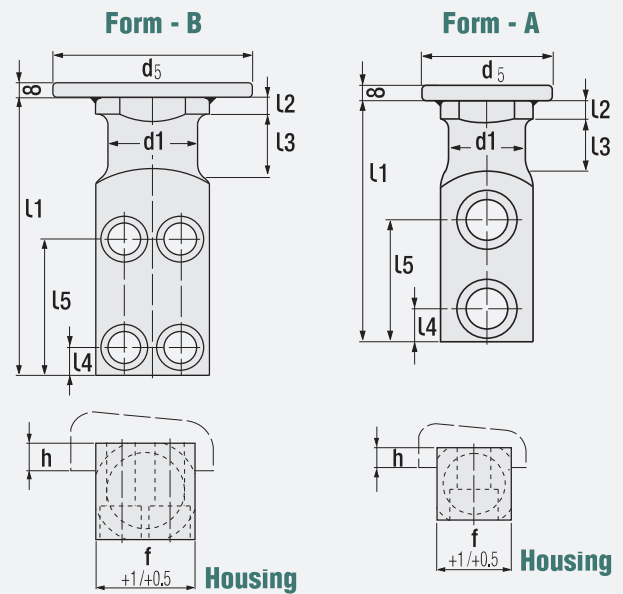

Code: **G58**

| f   | h  | l1  | l2 | l3 | l4 | l5  | Screw    | Form   |
|-----|----|-----|----|----|----|-----|----------|--------|
| 20  | 6  | 80  | 6  | 20 | 10 | 44  | M8 x25   | Form A |
| 25  | 8  | 90  | 8  | 25 | 10 | 47  | M10 x30  |        |
| 35  | 10 | 100 | 8  | 30 | 12 | 50  | M12 x40  |        |
| 40  | 10 | 120 | 10 | 32 | 16 | 62  | M16 x45  |        |
| 50  | 12 | 140 | 10 | 40 | 18 | 72  | M20 x60  |        |
| 60  | 14 | 160 | 12 | 45 | 22 | 81  | M24 x70  |        |
| 80  | 16 | 200 | 12 | 50 | 20 | 98  | M20 x90  | Form B |
| 100 | 18 | 250 | 15 | 65 | 25 | 125 | M24 x110 |        |
| 120 | 20 | 300 | 15 | 80 | 30 | 155 | M30 x130 |        |

| f   | d1  | d5  | Max.Load  | Max.Capacity | Form   |
|-----|-----|-----|-----------|--------------|--------|
| 20  | 16  | 60  | 320 Kg.   | 640 Kg.      | Form A |
| 25  | 20  | 70  | 630 Kg.   | 1260 Kg.     |        |
| 35  | 25  | 70  | 1250 Kg.  | 2500 Kg.     |        |
| 40  | 32  | 110 | 2000 Kg.  | 4000 Kg.     |        |
| 50  | 40  | 110 | 3200 Kg.  | 6400 Kg.     |        |
| 60  | 50  | 150 | 5000 Kg.  | 10000 Kg.    |        |
| 80  | 63  | 150 | 8000 Kg.  | 16000 Kg.    | Form B |
| 100 | 80  | 150 | 12500 Kg. | 25000 Kg.    |        |
| 120 | 100 | 150 | 20000 Kg. | 40000 Kg.    |        |

Material: 1.0503 700 ÷ 800 N / mm<sup>2</sup>



Order: **G58.f**