




"For your order of special dimensions, technical drawing can be used."

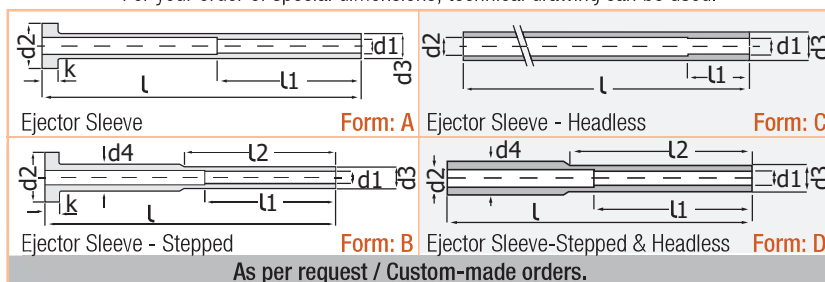

Ejector Sleeve - Nitrided / DIN ISO 8405

Code: **SMB**

Rear part of inner hole is ground in 30 - 45mm Ejector Pin working tolerance.
Drilled roughly with drill to rearward (until the head).


Material: 1.2343

Head Hardness: 45 ± 2 HRC

Body Hardness: 60 ± 2 HRC

Heat Resistance: 500 - 550° max.

Tensile Resistance: 1450 N / mm²

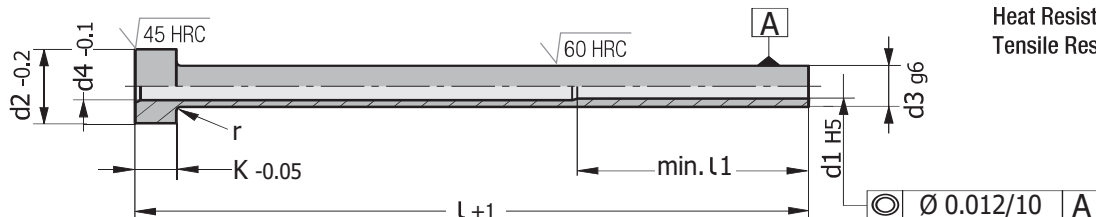

d3	l	d1	l1	d4	d2	k	r
4	75						
	100						
	125						
	150	2.0	35	2.3	8	3	0.3
	160						
	175						
	200						
	250						
5	75						
	100						
	125						
	150	2.5	35	3.0	10	3	0.3
	160						
	175						
5	200						
	250						
	75						
	100						
	125						
	150						
	160	3.0	45	3.3	10	3	0.3
	175						
5	200						
	250						
	300						

d3	l	d1	l1	d4	d2	k	r
6	75						
	100						
	125						
	150						
	160	3.5	45	4.0	12	5	0.5
	175						
	200						
	250						
6	300						
	75						
	100						
	125						
	150						
	160						
	175						
	200	4.0	45	4.3	12	5	0.5
6	250						
	300						
	350						
	400						
	450						
	500						

d3	l	d1	l1	d4	d2	k	r
8	75						
	100						
	125						
	150						
	160						
	175						
	200	5.0	45	5.3	14	5	0.5
	250						
8	300						
	350						
	400						
	450						
	500						
	75						
	100						
	125						
10	150						
	160						
	175						
	200	6	45	6.3	16	5	0.5
	250						
	300						
	350						
	400						
10	450						
	500						
	75						
	100						
	125						
	150						
	160						
	175						
12	200	8	45	8.3	20	7	0.8
	250						
	300						
	350						
	400						
	450						
	500						
	75						
12	100						
	125						
	150						
	160						
	175						

d3	l	d1	l1	d4	d2	k	r
12	200						
	250						
	300						
	350	8	45	8.3	20	7	0.8
	400						
	450						
	500						
	75						
14	100						
	125						
	150						
	160						
	175						
	200	10	50	10.3	22	7	0.8
	250						
	300						
14	350						
	400						
	450						
	500						
	75						
	100						
	125						
	150						
16	160						
	175						
	200	12	50	12.3	22	7	0.8
	250						
	300						
	350						
	400						
	450						
16	500						
	75						
	100						
	125						
	150						
	160						
	175						
	200						
16	250						
	300						
	350						
	400						
	450						
	500						

