





**Guide Pillar**  
(without oil groove) Code: G17

It is suitable as ejector plates and core systems at injection moulds and as die inner guide pillar in dies. It is compatible using with self-lubricating bronze bushes or bushing components with oil groove.

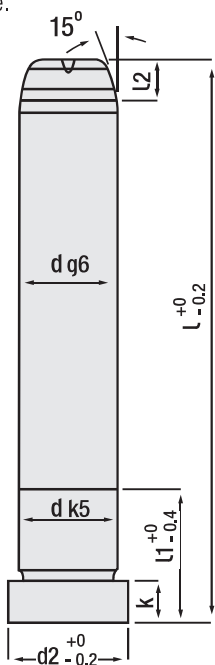

GTH guide pillars are polished with surface polishing machine at final stage of production (after grinding).




d	l	l1	l2	d2	k	
10	40	13	4	12	3	
	60					
	80					
	100	15				
	120					
12	40	18	4	16	6	
	60					
	80					
	100	22				
	120					
	140					
14	60	22	4	18	8	
	80					
	100					
	120	26				
	140					
	160					
	180					
16	40	16	7	20	8	
	60					
	80	24				
	100					
	120					
	140					26
	160					
	180					
200						

d	l	l1	l2	d2	k
18	60	26	7	22	8
	80				
	100				
	120	28			
	140				
	160				
20	60	28	7	24	8
	80				
	100				
	120	32			
	140				
	160				
	180				
22	80	37	7	26	15
	100				
	120	43			
	140				
	160				
	180				
	200				
	220				
	240				
	300				


d	l	l1	l2	d2	k
24	80	39	7	28	15
	100				
	120				
	140	45			
	160				
	180				
	200				
25	80	35	7	28	15
	100				
	120				
	140	44			
	160				
	180				
	200				
	220				
	240				
	300				
30	100	45	7	36	15
	120				
	140				
	160	53			
	180				
	200				
40	160	55	10	48	15
	180				
	200	63			
	220				
	240				
	280				
	300				
	320				
	360				
	50				
200					
240					
300					
300					
360					

**NEW**  
Note:  
Ø 25 Series  
are added  
in our  
stocks.

**Mould Mounting Example**

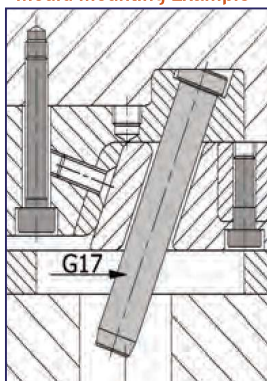

**Die Mounting Example**

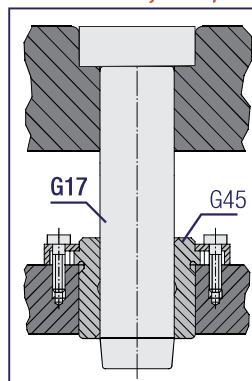

Order: **G17. d x l**

**Material:** < Ø 20 = 1.7131  
> Ø 20 = 1.1213 (Cf53)  
**Hardness:** 58 - 62 HRC

**Operating Components:** with all lubricated type bushes in injection moulds / dies.